



# MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

## VQ 150°C, High Temperature Range Series


- Applied Laminated case series
- Suited for automobile applications
- Complied to the RoHS directive
- AEC-Q200 compliant. Please contact us for details



Item	Characteristics																											
Operating temperature range	-40 ~ +150°C																											
Leakage current max.	I = 0.03CV or 4μA whichever is greater (after 1 minute)																											
Capacitance tolerance	±20% at 120Hz, 20°C																											
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.																											
	<table border="1"> <thead> <tr> <th>Rated Voitafe(V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> <td>0.08</td> </tr> </tbody> </table>	Rated Voitafe(V)	10	16	25	35	50	63	80	100	tanδ	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08									
Rated Voitafe(V)	10	16	25	35	50	63	80	100																				
tanδ	0.20	0.16	0.14	0.12	0.10	0.10	0.08	0.08																				
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>WV</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> </tr> </tbody> </table>	WV	10	16	25	35	50	63	80	100	Z-25°C/Z+20°C	3	2	2	2	2	2	2	2	Z-40°C/Z+20°C	4	4	4	4	4	4	4	4
	WV	10	16	25	35	50	63	80	100																			
	Z-25°C/Z+20°C	3	2	2	2	2	2	2	2																			
Z-40°C/Z+20°C	4	4	4	4	4	4	4	4																				
<table border="1"> <tbody> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>tanδ</td> <td>Less than 300% of specified value</td> </tr> </tbody> </table>	Leakage current	Less than specified value	Capacitance change	Within ±30% of initial value	tanδ	Less than 300% of specified value																						
Leakage current	Less than specified value																											
Capacitance change	Within ±30% of initial value																											
tanδ	Less than 300% of specified value																											
Shelf life (at 150°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																											

### ● DRAWING



Unit : mm

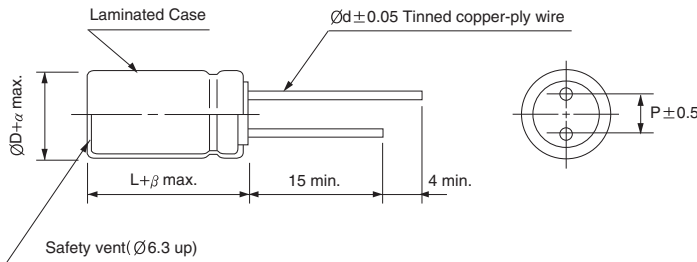

ØD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
Ød	0.6	0.6	0.8	0.8
α	0.5			
β	2.0			

(Ø10)

(Ø12.5)



### ● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

CV	Frequency	120Hz	1kHz	50kHz	100kHz ≤
1000 ≤ CV		0.67	0.91	0.95	1.00
1000 > CV		0.50	0.83	0.91	1.00

**VQ** series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10		16		25		35	
	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz
82							10 × 12.5	620
100							10 × 16	660
220					10 × 16	660	12.5 × 20	700
330			10 × 16	660	12.5 × 20	760	12.5 × 25	840
470	10 × 12.5	660	10 × 20	760	12.5 × 25	840	12.5 × 30	1000
							16 × 25	1000
1000	10 × 20	760	12.5 × 25	840	12.5 × 34.5	1100	18 × 31.5	1700
					16 × 25	1100		
2200	12.5 × 25	840	12.5 × 34.5	1100	18 × 31.5	1700		
			16 × 25	1100				
3300	12.5 × 34.5	1100	18 × 31.5	1700				
	16 × 25	1100						
4700	18 × 25	1700						
5600	18 × 31.5	1900						

WV Item μF	50		63		80		100	
	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz	∅D×L(mm)	Ripple current (mA rms) 150°C, 100kHz
33							10 × 12.5	260
47					10 × 12.5	260	10 × 16	330
56			10 × 12.5	450	10 × 16	330	10 × 16	390
68			10 × 16	650	10 × 16	390	10 × 20	465
100	10 × 16	700	10 × 20	820	10 × 20	465	12.5 × 20	670
220	12.5 × 20	890	12.5 × 25	1000	12.5 × 25	670	12.5 × 30	1100
330	12.5 × 25	1000	12.5 × 30	1300	12.5 × 34.5	1100	18 × 31.5	1500
470	12.5 × 30	1200	16 × 25	1500	18 × 25	1600	18 × 31.5	1750
560	12.5 × 34.5	1300	18 × 25	1650	18 × 31.5	1700		
	16 × 25	1300						
680			18 × 31.5	1850	18 × 31.5	1900		

MINIATURE TYPES